



## EMI/RFI Filter with very high attenuation for industrial and residential applications

Datasheet 3/2019


**FIN26.(003 - 020).M**
**FEATURES**

- Rated current from 3 to 20A
- Very low leakage current
- DIN rail mounting
- Panel mounting available

**MARKETS**

- Conveyors
- Automated machinery
- Variable frequency drives / servo drives
- Medical equipment

**APPROVALS:**

 UL1283  
CSA C22.2

**SCCR** by UL508A


**BENEFITS**

- 5 Year warranty
- Suitable for medical applications
- Compact design
- Very high differential and common mode attenuation

**ORDERING CODE**

FIN26	.016	.M
Model	Current (A)	Connection
		M = Terminal block

**ATTENUATION INDICATOR**

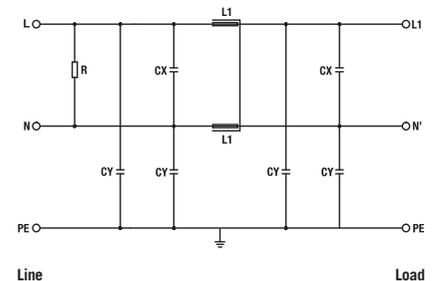**ELECTRIC DIAGRAM**

**TECHNICAL SPECIFICATIONS**

Nominal voltage	0 / 250 Vac
Frequency	50 – 60 Hz
Rated current	3 to 20A
Potential test voltage phase to phase	1750 Vdc (2 sec.)
Potential test voltage phase to ground	2150 Vdc (2 sec.)
Leakage current normal conditions	< 1 mA *
Leakage current worst conditions	< 3 mA
IP Protection	IP20
Overload capability	4 x Rated current (Switch ON) 2 x In 10 seconds 1.5 In for 10 minutes
Climatic class	-40 / +85° C
MTBF at 40°C	250.000 Hrs

\* Voltage 230 Vac phase to ground 50 Hz / 40°C


### ELECTRICAL CHARACTERISTICS

FIN26	Rated Current 40°C	Rated Current 50°C	Power Loss (W)
.003.M	3	2	1.5
.006.M	6	5	2.1
.010.M	10	8	2.8
.016.M	16	14	3.2
.020.M	20	17	4

### CONNECTIONS

LINE			PE
Solid Cable (mm <sup>2</sup> )	Stranded Cable (mm <sup>2</sup> )	Terminal Block Torque (Nm)	Torque (Nm)
0.2 - 6	0.2 - 4	0.8	0.8
0.2 - 6	0.2 - 4	0.8	0.8
0.2 - 6	0.2 - 4	0.8	0.8
0.2 - 6	0.5 - 4	0.8	0.8
0.2 - 6	0.5 - 4	0.8	0.8


### TYPICAL ATTENUATION

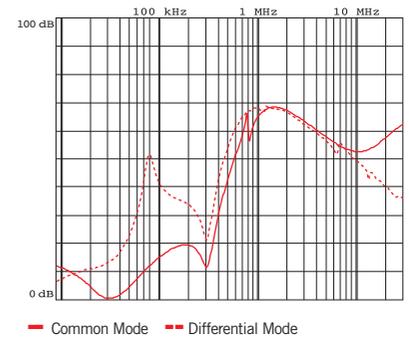

### MECHANICAL DIMENSIONS mm

FIN26	A	B	H	N	Weight Kg.	Case
.003.M	65	85	39	11	0.32	1
.006.M	65	85	39	11	0.32	1
.010.M	65	85	39	11	0.32	1
.016.M	65	85	39	11	0.32	1
.020.M	65	85 <td 39	11	0.32	1	

### CASE 1



### ASSEMBLY CONNECTION "M"

