


CARATTERISTICHE ELETTRICHE

FIN27G	Corrente Nominale 40°C	Corrente Nominale 50°C	Potenza Dissipata (W)
.003.M	3	2	1.5
.006.M	6	5	2.1
.010.M	10	8	2.8
.016.M	16	14	3.2
.020.M	20	17	4

CONNESSIONI

Cavo Rigido (mm ²)	LINEA		PE	
	Cavo Multifilare (mm ²)	Coppia Morsetto (Nm)	Coppia (Nm)	Coppia (Nm)
0.2 - 6	0.2 - 4	0.8	0.8	0.8
0.2 - 6	0.2 - 4	0.8	0.8	0.8
0.2 - 6	0.2 - 4	0.8	0.8	0.8
0.2 - 6	0.5 - 4	0.8	0.8	0.8
0.2 - 6	0.5 - 4	0.8	0.8	0.8


ATTENUAZIONE TIPICA

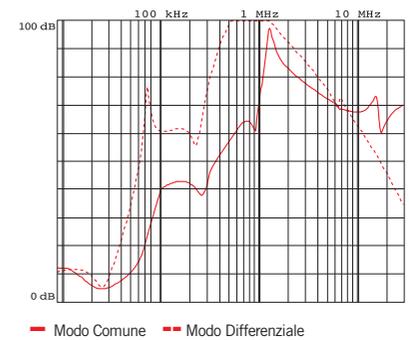

DIMENSIONI MECCANICHE mm

FIN27G	A	B	H	N	Peso Kg.	Custodia
.003.M	65	85	39	11	0.32	1
.006.M	65	85	39	11	0.32	1
.010.M	65	85	39	11	0.32	1
.016.M	65	85	39	11	0.32	1
.020.M	65	85	39	11	0.32	1

CUSTODIA 1



ASSEMBLAGGIO CONNESSIONE "M"

