



ELECTRIC CHARACTERISTICS

Rated frequency	50/60 Hz
Electric strength	4 kV
Insulation class	B
Max. ambient temperature	70°C


ELECTRIC DIAGRAM


EE 20	Max. output power (VA)	PRI (V)	SEC (V)	Short circuit protection
-01/...	0,35	115-250	3-24	Inherently short-circuit proof
-03/...	0,6	115-250	3-32	Inherently short-circuit proof


Approved to EN 61558
Safety class II

CONNECTION

Solder pins Ø 0,6 mm

MECHANICAL DIMENSIONS (mm)

EE 20	A	B	H	L	Weight (g)	Case
-01/...	23	22	15	15	25	O
-03/...	23	22	19	15	37	O

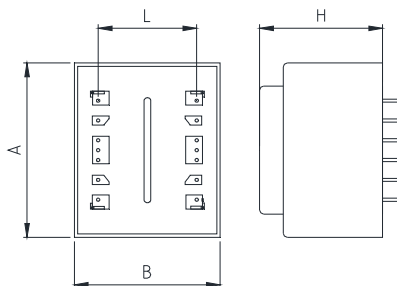CASE "O"


Further versions, prim. or sec. voltages, pin configurations on request.