

# MRI Filters RF Power Line Filters For Medical Shielded enclosures

## Electrical characteristics

---

Nominal voltage	0 - 277 V <sub>AC</sub> - 50/60 Hz
Test voltage (phase to phase)	2100 V <sub>DC</sub> (2 s)
Test voltage (phase to ground)	2100 V <sub>DC</sub> (2 s)
Leakage current to ground at 277 Vac 60 Hz 40 °C	< 10 mA

Model	Nom. Voltage [Vac]	Nom. Curr. [A] at TA=40°C	Leakage current [mA]	Case
ENR230	277	30	< 10	1
ENR205	277	5	< 10	1


## Attenuation

---

Model	10 MHZ	1 GHz
ENR230	> 100 dB	> 100 dB
ENR205	> 100 dB	> 100 dB

**Mechanical dimensions in mm**

Case 1

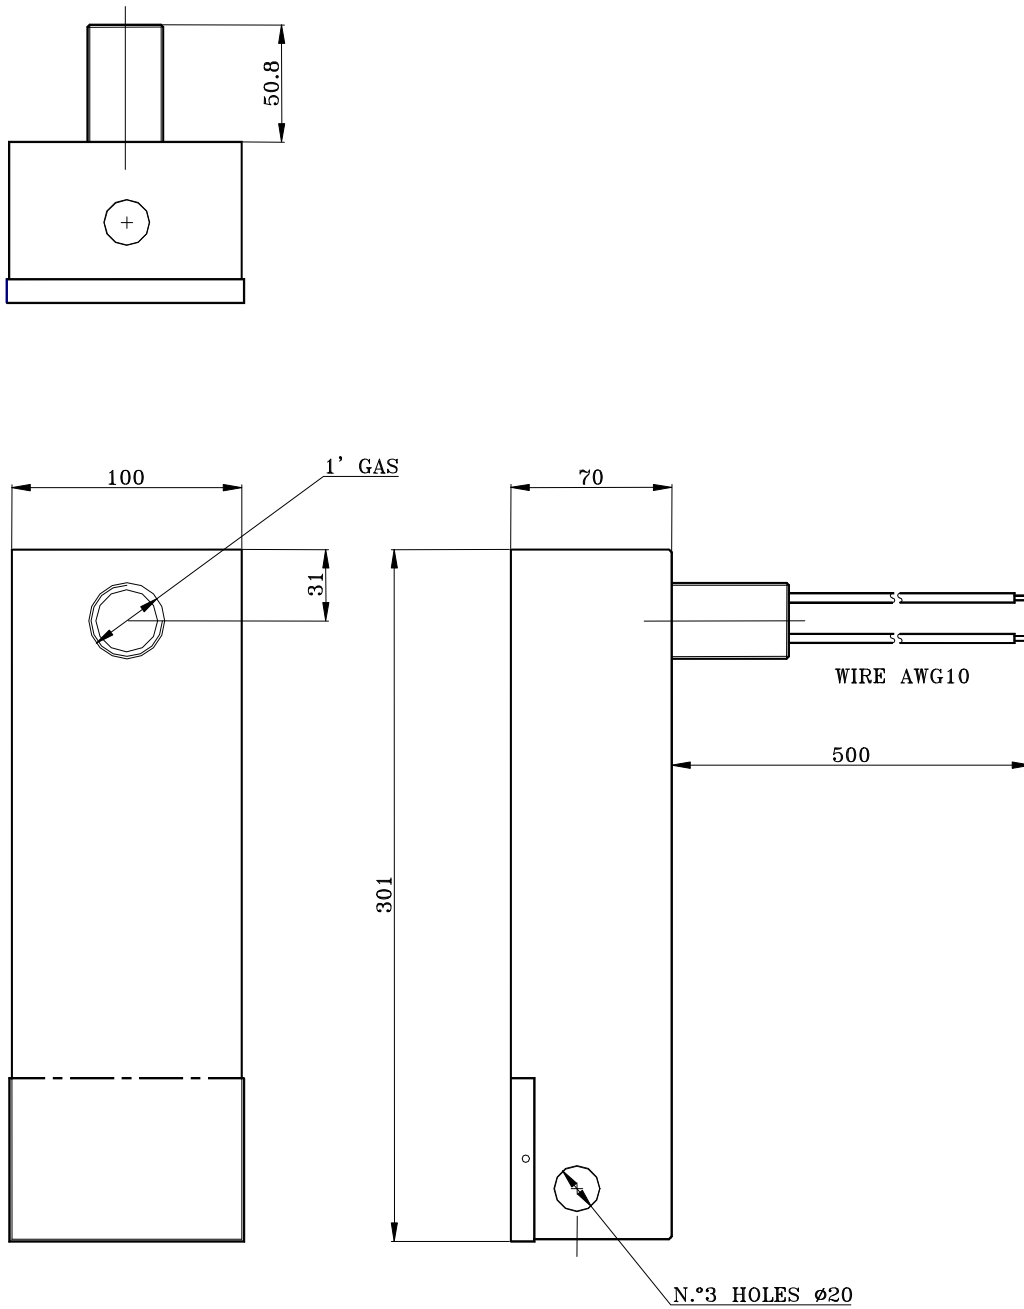

All the dimension are in mm.

